

# BAF 601 16, BAF 601 17

## Cabinets 23" Standard

■ DC Power for  
Business-Critical Continuity

### Features and benefits

- Available with variations in height and depth to meet needs of optimised space.
- Made to house both 19" and 23" equipment.
- Configurable battery shelf location.
- Selectable front and top covers.
- Possible to install against wall or free standing.
- Tip protection alternatives

Standard 23" cabinets for 19" and 23" equipment. Install against wall or as free standing cabinets.



# BAF 601 16, BAF 601 17

## Cabinets 23" Standard

DC Power for  
Business-Critical Continuity

### Technical Specifications

#### 600mm deep

Definition	Product Number	Module height (1U=44.45mm)	Weight (kg)	Measures (HxWxD mm)	Colour
Cabinet/basic 23"	BAF 601 16/160	34	52,0	1600x600x600	Grey (*)
Cabinet/basic 23"	BAF 601 16/180	39	58,0	1800x600x600	Grey (*)
Cabinet/basic 23"	BAF 601 16/200	43	64,0	2000x600x600	Grey (*)
3a Top cover/ Flex 48300	BMY 107 117/1	N.A	5,8	50x600x600	Zinc plated
3b Top cover/ other	BMY 107 119/2	N.A	3,5	4x600x600	Zinc plated
1 Battery shelf	BMY 201 270/2	N.A	5,3		Grey (*)
2 Guide plate	BMY 107 118/2	0.5U	3,6		Zinc plated


#### 400mm deep

Definition	Product Number	Module height (1U=44.45mm)	Weight (kg)	Measures (HxWxD mm)	Colour
Cabinet/Basic 23"	BAF 601 17/080	20	25,0	800x600x400	Grey (*)
Cabinet/basic 23"	BAF 601 17/120	25	32,0	1200x600x400	Grey (*)
Cabinet/basic 23"	BAF 601 17/160	34	40,0	1600x600x400	Grey (*)
Cabinet/basic 23"	BAF 601 17/180	39	45,0	1800x600x400	Grey (*)
3a Top cover/ Flex 48300	BMY 107 117/2	N.A	3,3	50x600x400	Zinc plated
3b Top cover/ other	BMY 107 119/3	N.A	2,5	4x600x400	Zinc plated
1 Battery shelf	BMY 201 270/3	N.A	3,5		Grey (*)
2 Guide plate	BMY 107 118/3	0.5U	2,2		Zinc plated

#### Common parts

Definition	Product Number	Module height (1U=44.45mm)	Weight (kg)	Measures (HxWxD mm)	Colour
Installation utility	BMY 201 269/1	N.A	0,5		
5a Cover plate 1,5U, Front aligned	SXA 209 2986/1	1.5U	1,2		Zinc plated
5b Cover plate 3U, Front aligned	SXA 209 2970/1	3U	2,2		Zinc plated
4 Front cover 800	SXX 122 0688/800	800mm	5,0		Grey (*)
4 Front cover 1200	SXX 122 0688/1200	1200mm	6,0		Grey (*)
4 Front cover 1600	SXX 122 0688/1600	1600mm	7,3		Grey (*)
4 Front cover 1800	SXX 122 0688/1800	1800mm	8,6		Grey (*)
4 Front cover 2000	SXX 122 0688/2000	2000mm	9,9		Grey (*)
19" mounting brackets 1U	BMY 201 291/1	1U	0,2		Zinc plated
19" mounting brackets 3U	BMY 201 291/2	3U	0,3		Zinc plated
19" mounting brackets 6U	BMY 201 291/3	6U	0,5		Zinc plated

(\*) Textured powder coating, grey, MZY 901 10/01 K806

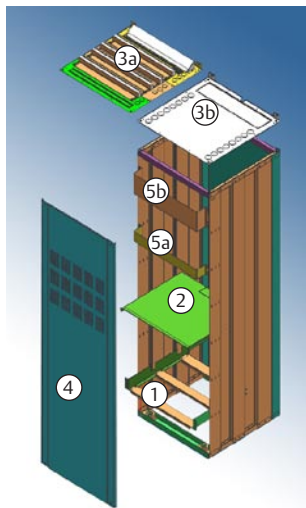

For global contact, visit:  
[www.emersonenergy.com](http://www.emersonenergy.com)

EN/LZT 145 214 RC

© Emerson Network Power Energy Systems 2005

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

**Emerson Network Power.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2005 Emerson Electric Co.